


Akustik bar stool

Gärtnäs

Design by Åke Axelsson, 2009
Article ID: 6143

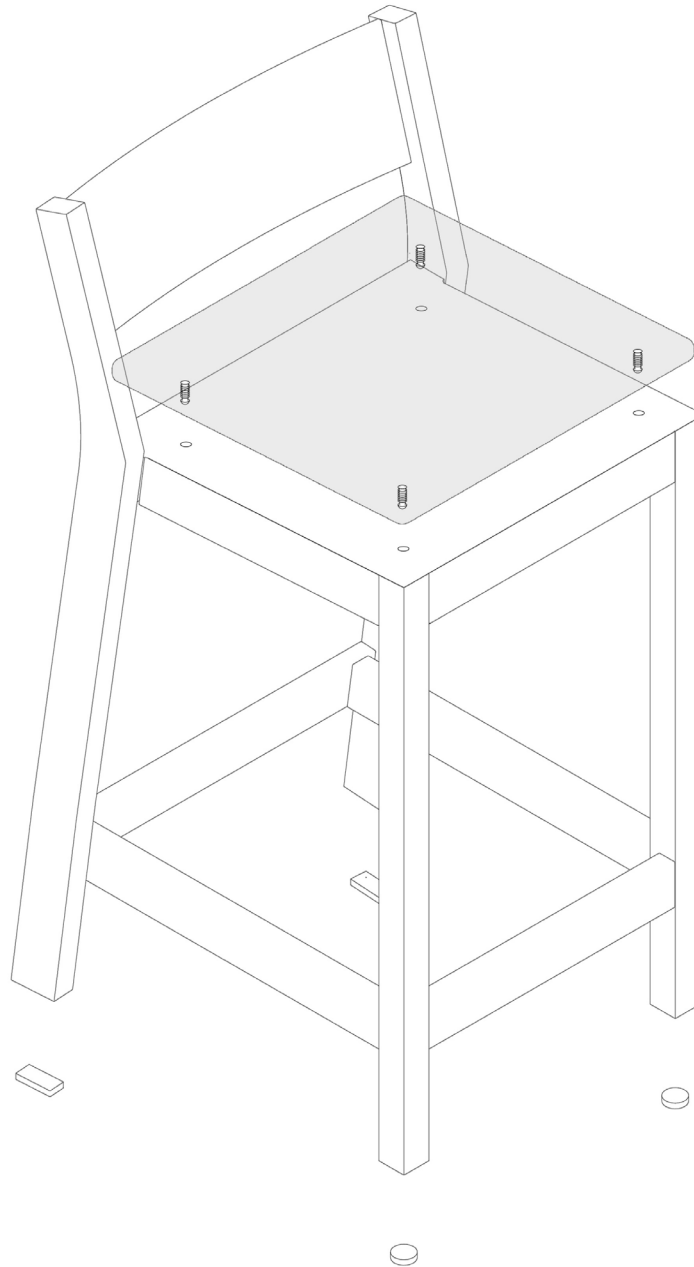

Disassembly

The following components can easily be disassembled for repair, maintenance, or recycling:
Remove and replace the upholstery from the seat – the upholstery is mounted on a separate board that can be snapped off and on by hand or with a small tool, allowing it to be re-upholstered.
Remove and replace the plastic glides from the base.
Remove and replace the aluminium footrest plates – each plate is mounted with two screws.

Factory Disassembly

Disassembly of the wooden frame and replacement of the upholstery on the backrest should only be carried out at the Gärtnäs factory or by a certified service partner.